


Yb401-PM

PM Yb-Doped Single Clad Fiber

The Yb401-PM is a single-clad and truly single-mode polarization-maintaining fiber featuring a 6.0 μm MFD @ 1060 nm, a core absorption of 140 dB/m @ 915nm and low photodarkening core chemistry. This fiber is well adapted for low power pulsed amplifiers pumped using single-mode laser diodes. The Yb401-PM is a low-photodarkening drop-in equivalent of the Yb501-PM fiber.

SPECIFICATIONS

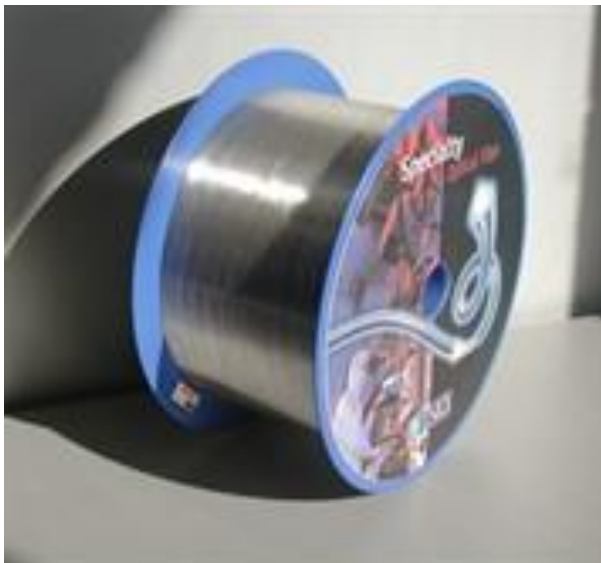

Typical Applications

- Low power pulsed amplifiers

Optical Properties	
Core NA	0.14 ± 0.02
Mode field diameter @1060 nm	6.0 ± 1.0
LP ₁₁ cut-off wavelength	800 - 900 nm
Core absorption @ 915 nm	140 ± 25 dB/m
Nominal core absorption @ 975 nm	600 dB/m
Birefringence	≥ 3.0 x 10 ⁻⁴
Physical Properties	
Optical cladding	Single
Core diameter	5.0 ± 0.5 μm
Cladding diameter	125.0 ± 1.0 μm
Coating diameter	250.0 ± 10.0 μm
Cladding geometry	Round
Low photodarkening chemistry	Yes
Screen proof tested	≥ 100 kpsi
Confined core	No
Depressed cladding	No